



PLAN

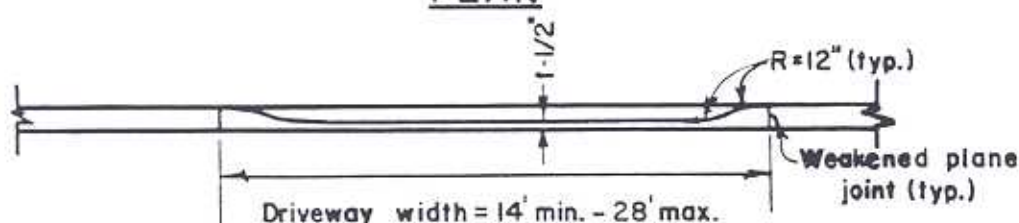


ELEVATION

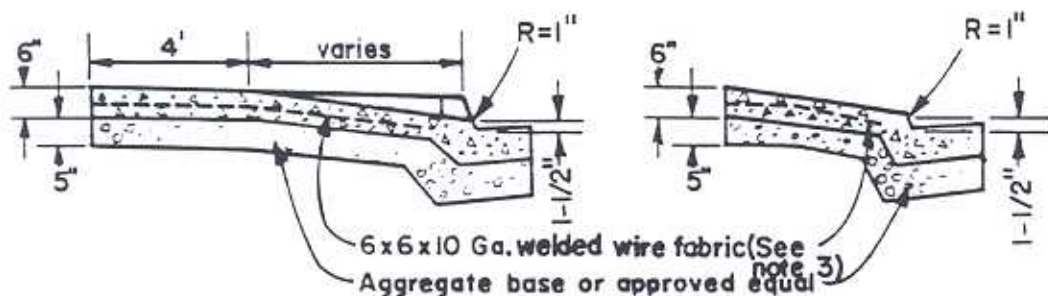

NOTES:

- Score lines shall be 1/4 inch deep and 48 inches apart in sidewalk areas.
- PCC shall be 'Class A' or an approved 3000 psi mix with a light broom finish.
- Welded wire fabric shall be used when driveway serves more than one residential units.
- Driveway locations shall be approved by the City Engineer.
- The minimum spacing between driveways serving the same parcel shall be 18 feet.
- Limits of Driveway widths shall be as shown unless otherwise approved by the City Engineer.
- Access to developed site shall be maintained.

REV	DATE	APPROVED	DESIGN	CITY OF MILPITAS PUBLIC WORKS DEPARTMENT ENGINEERING DIVISION STANDARD DRAWING	RESIDENTIAL DRIVEWAY	NO. 430
			DRAWN			
			CHECKED			
			APPROVED BY 			
			CITY ENGINEER			
			DATE 10/6			ADOPTED C# 2560 DATE: 1-21-75 SHEET 1 OF 1